


WX LYNX

GOGGLE

MIL-PRF-32432A ANSI Z.87 EN166B

The WX Lynx goggle was originally designed for military parachuters, but can serve many other purposes. These compact, foldable goggles easily fold in the middle for effortless storage, making them ideal for on-the-go activities or as a backup pair of eyewear. It comes in a protective case that has room for the goggle and two extra sets of lenses, allowing for quick swaps to adapt to varying light

conditions. With the removable foam Facial Cavity™ Seal with ventilation vents, these goggles fit snugly against your face while preventing fogging to ensure clear vision. Equipped with an adjustable elastic strap with sliders, it offers a customizable fit for any head size. Yellow and light rust lenses are available separately, expanding your options for adapting to different light conditions.

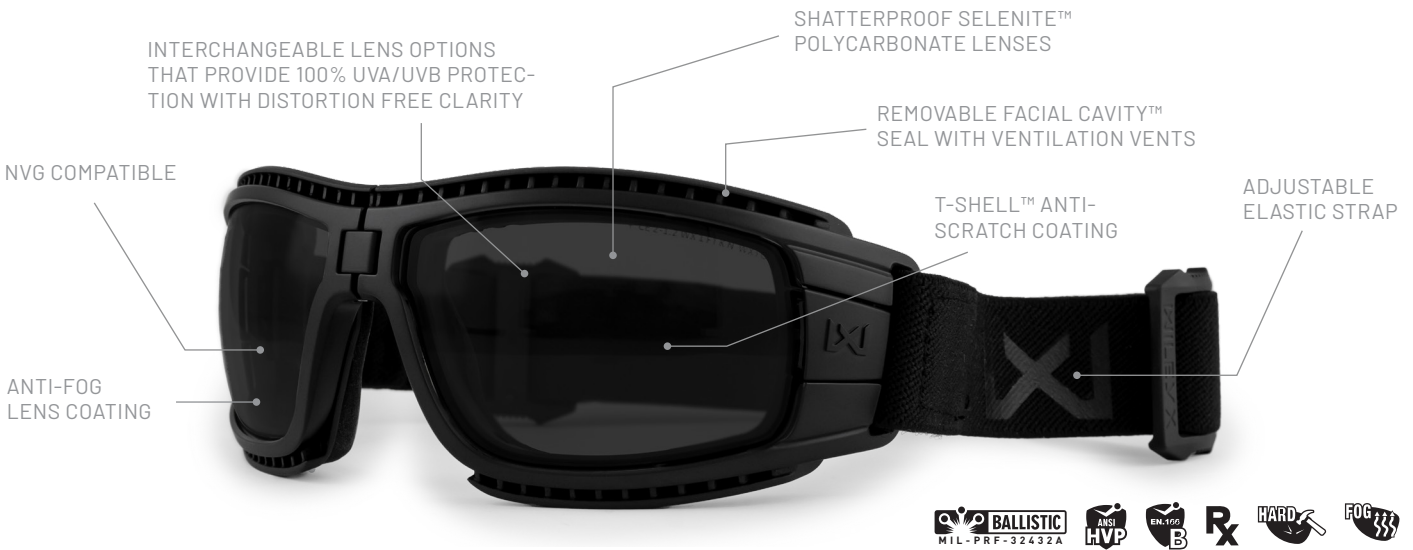

STANDARD LENSES *LIGHT TRANSMISSION VARIES +/- 3% DEPENDING ON MODEL

	GREY	SELENITE™ POLYCARBONATE	WEIGHT: 15 GRAM	LT: 15%*	COATING: HARD COATING, ANTI FOG
	CLEAR	SELENITE™ POLYCARBONATE	WEIGHT: 15 GRAM	LT: 89%*	COATING: HARD COATING, ANTI FOG
	LIGHT RUST	SELENITE™ POLYCARBONATE	WEIGHT: 15 GRAM	LT: 52%*	COATING: HARD COATING, ANTI FOG
	YELLOW	SELENITE™ POLYCARBONATE	WEIGHT: 15 GRAM	LT: 82%*	COATING: HARD COATING, ANTI FOG

FRAMES HEAD SIZE: MEDIUM TO 2-XLARGE // FRAME SIZE: 72 / 13 / ADJ

	MATTE BLACK	TEMPLES: ELASTIC	TRILOID™ NYLON	WEIGHT: 47 GRAM
	MATTE TAN	TEMPLES: ELASTIC	TRILOID™ NYLON	WEIGHT: 47 GRAM
	OD GREEN	TEMPLES: ELASTIC	TRILOID™ NYLON	WEIGHT: 47 GRAM

PACKAGES


1501	FRAME: MATTE BLACK	LENSES: GREY + CLEAR	NSN 4240-22-639-8662
1501T	FRAME: MATTE TAN	LENSES: GREY + CLEAR	NSN 4240-22-639-8664
1501G	FRAME: OD GREEN	LENSES: GREY + CLEAR	NSN 4240-22-639-8665

LENS & GASKET REMOVAL/INSTALLATION INSTRUCTIONS


LENS REMOVAL



1. Unlock the frame by simultaneously pressing up and down on the back of the lens retaining mechanism with your thumb.

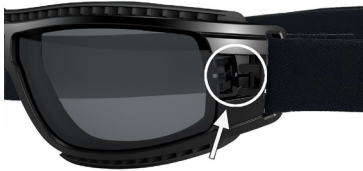


2. Open the lens retaining mechanism fully.

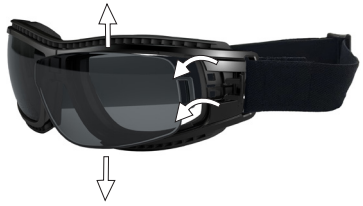

3. Gently pull on the frame around the lens while pressing on the back of the lens to pop it out of the frame.

LENS INSTALLATION

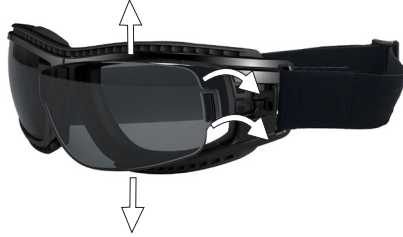

1. Align the lens with the opening in the frame. Gently pull on the frame around the lens while pushing the lens in place with your thumbs.



2. Once you hear the lens click into place, press down on the lens retaining mechanism to secure it.

GASKET REMOVAL/INSTALLATION



With the eyewear facing you, grasp the edges of the gasket where the venting is and pull away from the frame.



To install it, line up the edges of the gasket with the frame and press the two together until you hear a click.

IMPACT PERFORMANCE

Founded on supplying military forces and law enforcement personnel with top-of-the-line ballistic eyewear, Wiley X continues to hold safety as our priority, making sure to meet international expectations and accredited test standards. This model passes the following tests:

